

OFF GRID MX 30/75 LI



FEATURES:

- Deep cycle automotive NMC Li-Ion battery
- Advanced EMS with touch screen control
- GSM Remote monitoring
- Full system DC isolator with pre-charge
- Auto Full system bypass
- Single to three phase conversion



Output specifications

Output power (Continuous)	kVA	30
Output power peak (5s)	kW	60
Voltage	V	400/230
Frequency	Hz	50
Phases		3



Battery specifications

Battery (Type)		Li-Ion NMC
Battery rated Voltage	V	55.5
Battery design life (to 80% DoD)	cycles	3000
Battery Nominal capacity (sizes)	kWh	75
Usable energy AC side (@80% DoD)	kWh	60



General Description

Off Grid MX is a universal Battery Energy Storage system (BESS) ideally suited to a range of applications, delivering reliable power in the most cost effective and environmentally sensitive way. Energy stored within the unit is converted electronically into AC power. Power can be derived from connection to an external grid supply, from a diesel generator or solar PV or wind turbine. Energy is automatically managed from any or all of these energy sources to ensure the most efficient, lowest maintenance and best environmental impact is achieved. Remote communication ensures real time monitoring and maintenance can be effected from any location in the world.



Input specifications

Maximum input Three Phases socket 400V	A	63
Maximum input Single Phase socket 230V	A	63
System pass-through capacity	A	63

Installation data


Length	(L) mm	1600
Width	(W) mm	1020
Height	(H) mm	1708
Weight	kg	1150
Protection rating	IP	34

Performance

Operating temperature range (charging suspended below 0°C)	°C	-10...45
--	----	----------

Instruments, controls & connections

Inverter protection Short Circuit	✓
Inverter protection Overload	✓
Inverter protection Over Temperature	✓
Inverter protection Low Battery	✓
System status control panel	✓
Battery condition	✓
Battery main isolator	✓
Remote monitoring device	✓
Automatic generator auto-start signal	✓
Input 16A 400/230V IEC 60309 3ph	1
Input 63A 400/230V IEC 60309 3ph	1
Input connection	IEC 60309 or hardwire stud
Output MCB's	✓
Output Protection RCBO / RCD	✓
Output 16A 230V IEC 60309 1ph	1
Output 32A 400/230v IEC 60309 3ph	1
Output 63A 400/230v IEC 60309 3ph	1
Output connection AC	400V 3Phase IEC 60309 or hardwire stud

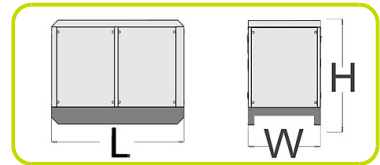


BATTERY STORAGE DEPLOYED WITH GENERATOR TO SUPPLY SITE WELFARE UNIT



Optional features

Solar PV charge controller	MPPT
EV Charge Point	EVC
Custom sockets distribution	CS
Custom colors	DCCX

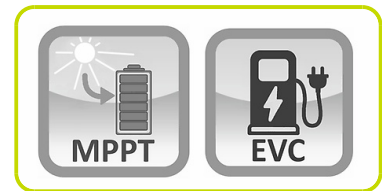

www.pramac.com



Auckland, Head Office
 6-10 Parkway Drive,
 Mairangi Bay,
 Auckland
 (+64) 09 443 2436
 sales@yrco.co.nz

Auckland, Mt Wellington
 20L Sylvia Park Road,
 Mt Wellington,
 Auckland
 (+64) 09 553 5470
 salesmtwell@yrco.co.nz

Waikato
 3/31 Chafer Place,
 Te Rapa,
 Hamilton
 (+64) 07 595 0245
 saleswaikato@yrco.co.nz

Wellington
 8 Broken Hill Road,
 Porirua,
 Wellington
 (+64) 04 212 2456
 saleswell@yrco.co.nz

Christchurch
 20 Nga Mahi Road,
 Sockburn,
 Christchurch
 (+64) 03 341 6923
 saleschch@yrco.co.nz